

# SENEBOGEN

**PRELIMINARY**



**92** kW



**16** t



**24** m



**MULTICAB**

# 613E

Telescopic crawler crane

# 613E Advanced. The E-Series



1978: TX10 telescopic crane

## What makes up the E-Series

- Over 25 years of experience in construction and building of highly specialized telescopic cranes
- Uncompromisingly high performance in all areas
- Technology that can be mastered: High-quality components without over-engineering
- Long service life and high value stability

## Your top benefits:

1

### Green Efficiency

Save fuel – reduce operating costs  
Work quietly – protect operator and environment



2

### Peak performance

Robust boom system – work on an incline of up to 4°  
High cable speed

3

### Maximum usability



multicab – work in comfort  
SENCON – work program selection made easy

4

### Flexibility in service

Operate under full load – less space required  
Strong undercarriage traction – good off-road capability

5

### Easy transport

Telescopic undercarriage – ready to go in no time – short-set-up time

6

### Maintenance and service made easy

SENNEBOGEN control system – easy error diagnostics  
Simple maintenance – clear labeling

7

### Consultation and support in your area

3 production sites – 2 subsidiaries  
130 sales partners – over 350 service stations





# 613E Technical data, equipment

## MACHINE TYPE

Model (type) **613**

## ENGINE

Model	<b>FPT N45, 92 kW / 125 hp at 2,200 rpm</b> Compliant with Tier 4f emission standards  <b>FPT N45, 92 kW / 125 hp at 2,200 min</b> Compliant with Tier 3a emission standards  Direct injection, turbo-charged, charge air cooling, reduced emissions
Cooling	Water-cooled
Diesel filter	With water separator and heating system
Air filter	Dry filter with integrated pre-separator, automatic dust discharge, main element and safety element, contamination indicator
Fuel tank	<b>200 l</b>
DEF tank	<b>43 l</b>
Electr. system	<b>24 V</b>
Batteries	<b>2 x 155 AH</b>
Options	<ul style="list-style-type: none"> <li>Low temperature package with engine pre-heating and heated diesel filter</li> <li>Electric fuel pump</li> </ul>

## UPPERCARRIAGE

Design	Torsion-resistant box design, precision-crafted, steel bushings for boom bearings. Extremely service-friendly design, longitudinal engine
Electrical system	Central electrical distributor, battery disconnect switch
Cooling system	3-circuit cooling system with high cooling capacity, electronically regulated fan drive for water, charge air and oil cooler
Safety	Rearview and right sideview cameras, LED lighting package
Options	<ul style="list-style-type: none"> <li>Additional LED headlights</li> <li>Up to 2 additional cameras</li> <li>Maritime climate varnishing as corrosion protection</li> <li>Low temperature package</li> <li>Automatic central lubrication for boom pivot point, luffing cylinder, slewing ring track and winch drum bearing</li> <li>Pinion tooth lubrication for slewing ring</li> </ul>



## HYDRAULIC SYSTEM


Pump unit mounted directly on diesel engine. Load sensing/ LUDV hydraulic system, electrohydraulic pilot-controlled work functions, load limit sensing control	
Pump type	Axial piston variable displacement pump. The independent, proportional allocation of the pump quantity allows several work functions to be controlled with precision simultaneously and independently from one another
Pump control	Zero-stroke control, speed-dependent adjust- ment of drive pump and axial piston regula- tor. Auxiliary functions via gear wheel pump.
Operating pressure	max. <b>330 bar</b>
Filtration	High-performance filtration with long change interval
Hydraulic tank	<b>180 l</b>
Control system	Servo joystick operation for work movements.
Safety	Hydraulic circuits secured with safety valves. Pipe fracture safety valve for luffing and tele- scoping cylinders
Options	<ul style="list-style-type: none"> <li>Bio-oil – environmentally friendly</li> <li>SENNEBOGEN HydroClean 3 µm hydraulic microfilter</li> <li>Hydraulic tank preheater</li> </ul>





## SLEWING DRIVE


Gearbox	Compact planetary gear with hydraulic and electric rotor, integrated brake valves
Slewing gear brake	Spring-loaded disk brake, pedal for individual braking
Slewing ring	Oversized slewing ring, sealed. Highly precise, powerful slewing function.
Slewing speed	<b>0-2 rpm</b> , variable


# 613E Technical data, equipment

CAB 	
Cab type	MultiCab, can be elevated 1.75 m
Cab equipment	Hydraulically elevating cab as standard. Flexibly mounted comfortable cab with super sound insulation. All-weather design, all-round glazing in safety glass and large roof window, adjustable windshield. Flexibly mounted comfortable seat, adjustable according to weight and shock-absorbent. Dashboard overview with swiveling steering column. Variable, controllable cab heating with air circulation stage and particle filter, automatic climate control
Options	<ul style="list-style-type: none"> <li>■ Auxiliary heating system with timer</li> <li>■ Protective roof grating</li> <li>■ FOPS protective roof grating</li> <li>■ Radio with USB and SD connection, MP3 and Bluetooth function</li> </ul>

ATTACHMENTS 	
Design	Decades of experience and the latest computer simulations guarantee maximum stability and service life.
Telescopic boom	3-part with pulley head, hydraulic telescoping.
Hoisting winch	Slant-axis hydraulic motor drive with compact planetary gear, 35 kN traction, 0–95 m/min. cable speed, 14 mm cable diameter.
Safety brake	Spring-loaded disk brake
Crane safety	Next-generation load moment monitoring, straightforward panel displaying all important data through SENCON display, lifting limit switch, cable exit protection, pressure relief valves and pipe fracture safety device with Eventrecorder
Cylinders	Hydraulic cylinders with high-quality sealing and guide elements
Options	<ul style="list-style-type: none"> <li>■ 5 m fly boom with swing-away jib, extremely fast and easy setup without auxiliary devices, locked on basic boom when not in use</li> </ul>

UNDERCARRIAGE 	
Design	Very strong, hydraulically telescoping crawler undercarriage, with integrated, protected drive transmission
Drive	Strong travel drive featuring 2-stage variable-displacement hydraulic motor with direct-mounted, automatically actuated brake valve and compact planetary gear on each running gear side
Parking brake	Spring-loaded disk brake
Traveling gear	Maintenance-free tractor running gear with hydraulic chain tension, 600 mm 3-grouser base plates
Speed	0–1.2 / 0–2.2 km/h
Options	Available base plate types: <ul style="list-style-type: none"> <li>■ 700 mm 3-grouser base plates</li> <li>■ 800 mm 3-grouser base plates</li> </ul>

OPERATING WEIGHT 	
Mass	<b>613 R</b> With 18.8 m telescopic boom, 5 m fly boom, 10.5 t hook.  3-grouser base plates 600 mm approx. <b>24,300 kg</b> 700 mm approx. <b>24,650 kg</b> 800 mm approx. <b>25,000 kg</b>  Operating weight varies by model.

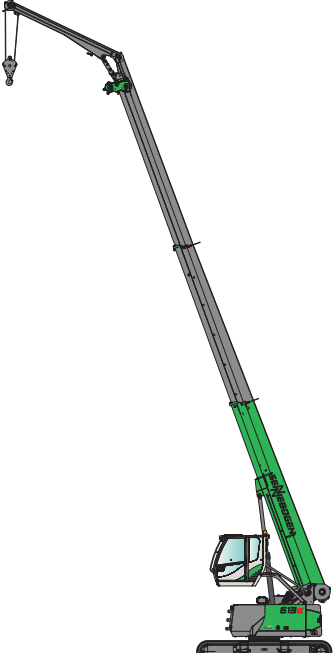


# 613E Crane equipment



## 18.8 m main boom (HA)

### Comments:

1. The specified load ratings apply when the machine is standing level and firm.
2. The load ratings apply to the 613 R with extended crawler undercarriage (3,000 mm track); the load ratings in brackets ( ) apply when the crawler undercarriage is retracted (1,880 mm track).
3. The load ratings take into account the standards DIN 15019.2 and ISO 4305
4. The weight of the load handling devices (e.g. hook, suspension gear) must be subtracted from the load ratings.
5. Load ratings must be limited or reduced when conditions are unfavorable, such as soft or uneven ground, slopes, wind, lateral loads, swinging loads, jerking or sudden stopping of load, operator inexperience, driving with load.
6. Permissible rope winch per strand in crane mode for cable diameter 14 mm – 3,500 kg
7. Load ratings indicated with \* apply only in the case of special equipment.
8. The specified load ratings are guidelines only. The currently valid load ratings can be found in the tables in the operating manual.

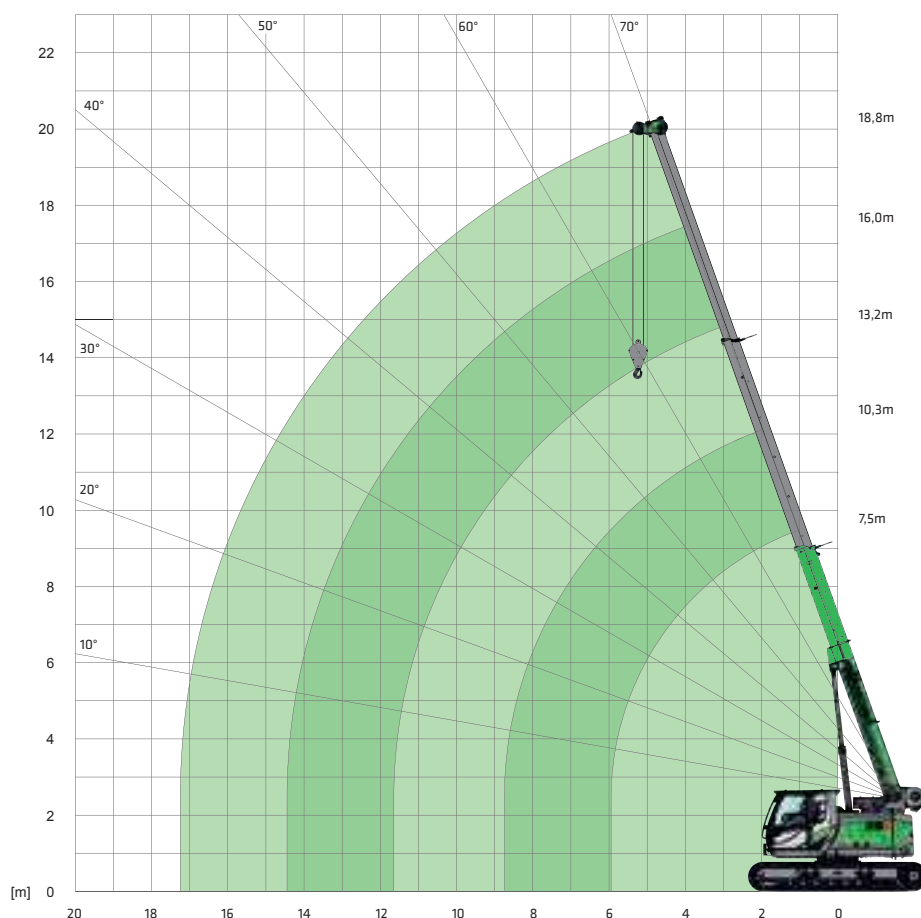


## 18.8 m main boom (HA)

Outreach [m]	Boom length [m]				
	7.5	10.3	13.2	16	18.8
2.0	15.0 (12.0)				
3.0	13.3 (8.3)	10.0 (8.4)			
4.0	10.6 (5.3)	10.0 (5.3)	8.0 (5.4)		
5.0	8.5 (3.7)	8.6 (3.8)	8.0 (3.8)	6.0 (3.9)	
5.5	7.5 (3.2)	7.6 (3.4)	7.4 (3.4)	6.0 (3.4)	4.5 (3.4)
6.0	5.7 (2.9) / 6.0 m	6.7 (2.9)	6.7 (2.9)	5.9 (2.9)	4.5 (2.9)
7.0		5.2 (2.3)	5.3 (2.3)	5.2 (2.3)	4.5 (2.3)
8.0		4.2 (1.8)	4.3 (1.8)	4.3 (1.8)	4.1 (1.9)
9.0		3.6 (1.5) / 8.8 m	3.5 (1.5)	3.6 (1.5)	3.6 (1.5)
10.0			3.0 (1.2)	3.0 (1.2)	3.0 (1.2)
11.0			2.6 (1.0)	2.6 (1.0)	2.6 (1.0)
12.0			2.4 (0.9) / 11.6 m	2.2 (0.8)	2.3 (0.8)
13.0				2.0 (0.7)	2.0 (0.7)
14.0				1.7 (0.6)	1.7 (0.6)
15.0				1.6 (-) / 14.4 m	1.5
16.0	Table no.: 613R-HD/18.8/75/1703(1453)/4.1/08.06				1.3
17.0					1.1 / 17.3 m

# 613E Crane equipment



14.6 m main boom (HA)

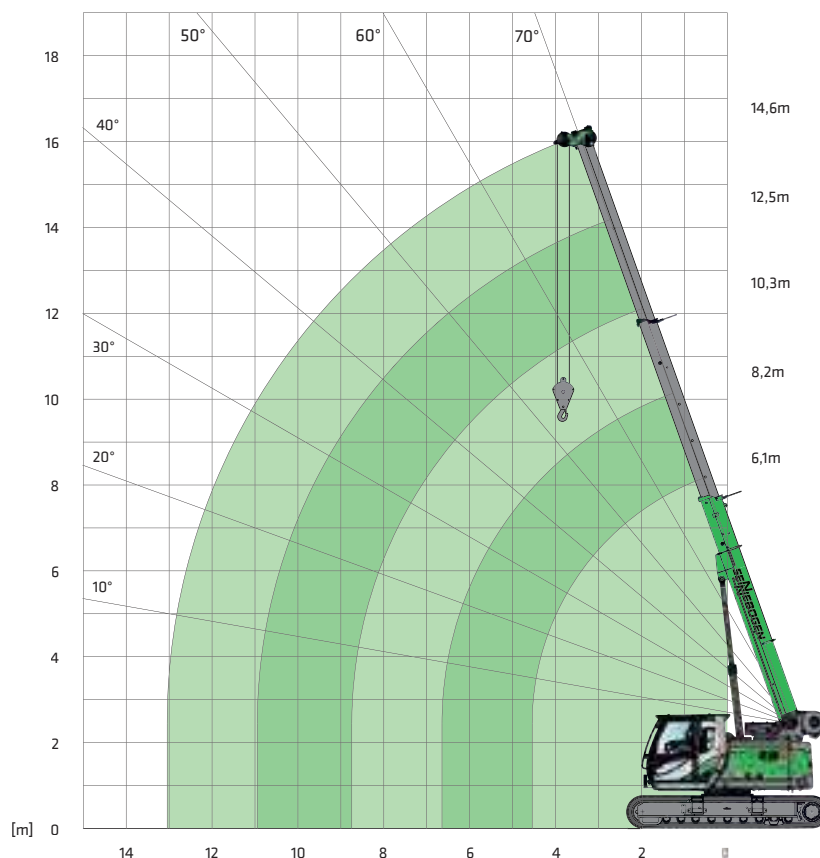

14.6 m main boom (HA)

Outreach [m]	Boom length [m]				
	6.1	8.2	10.3	12.5	14.6
1.0	16.0 (12.0)				
2.0	16.0 (12.0)	13.0 (12.0)			
3.0	13.5 (8.3)	13.0 (8.3)	11.0 (8.4)		
4.0	10.8 (5.3)	10.9 (5.4)	10.5 (5.4)	8.3 (5.4)	6.5 (5.4)
4.5	9.6 (4.4)	9.8 (4.6)	9.6 (4.6)	7.8 (4.6)	6.3 (4.6)
5.0		8.7 (3.9)	8.7 (3.9)	7.2 (3.9)	6.1 (3.9)
6.0		6.8 (2.9)	6.8 (3.0)	6.3 (3.0)	5.3 (3.0)
7.0		5.1 (2.5) / 6.7 m	5.3 (2.4)	5.4 (2.4)	4.6 (2.4)
8.0			4.3 (1.9)	4.4 (1.9)	4.1 (2.0)
9.0			2.7 (1.6) / 8.8 m	3.7 (1.6)	3.7 (1.6)
10.0				3.1 (1.3)	3.1 (1.4)
11.0				2.7 (1.1) / 10.9 m	2.7 (1.1)
12.0	Table no.: 613R-HD/14.6/75/1703(1453)/4.1/08.06				2.3 (1.0)
13.0					2.1 (0.8)



Hook

Capacity	Weight	Cable reeving and maximum load rating					
		5	4	3	2	1	
17.5 t (2-pulley)	180 kg	17,500 kg	14,000 kg	10,500 kg	7,000 kg	3,500 kg	for main boom
10.5 t (1-pulley)	100 kg			10,500 kg	7,000 kg	3,500 kg	for main boom
4 t	40 kg					5,000 kg	for fly boom

# 613E Crane equipment




5.0 m fly boom  
(SA)



18.8 m HA



5.0 m SA

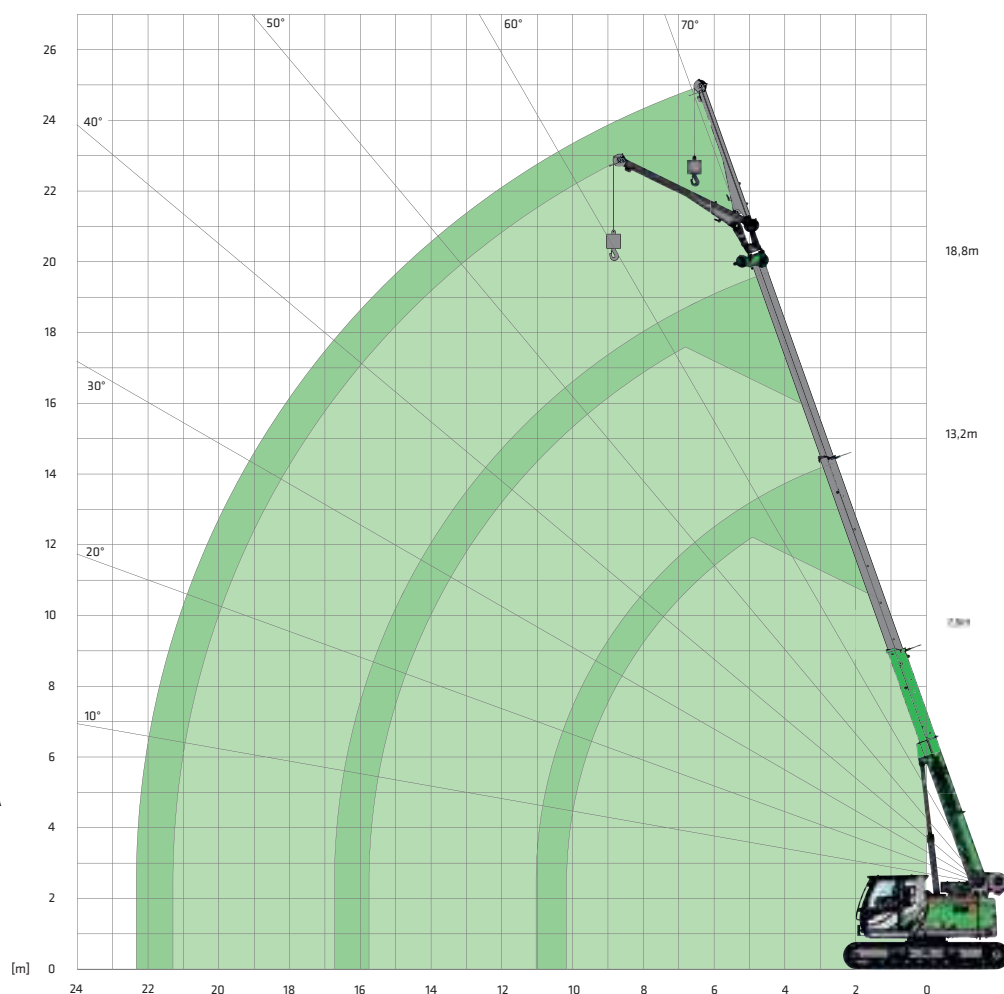

Outreach [m]	Telescopic boom length [m]									
	7.5		10.3		13.2		16.0		18.8	
	0°	45°	0°	45°	0°	45°	0°	45°	0°	45°
4.0	3.8 (3.8)		4.4 (4.4)							
5.0	3.3 (3.3)		3.8 (3.8)		4.2 (4.0)					
6.0	2.9 (2.9)	2.0 (2.0)	3.4 (3.1)		3.8 (3.0)		3.8 (3.0)			
7.0	2.5 (2.5)	1.9 (1.9)	3.1 (2.4)	2.0 (2.0)	3.4 (2.4)		3.5 (2.3)		2.7 (2.3)	
8.0	2.2 (2.1)	1.9 (1.9)	2.8 (2.0)	2.0 (2.0)	3.1 (1.9)	2.0 (1.9)	3.2 (1.9)		2.7 (1.8)	
9.0	2.0 (1.7)	1.8 (1.7)	2.5 (1.6)	1.9 (1.6)	2.8 (1.5)	2.0 (1.5)	2.9 (1.5)	1.9 (1.5)	2.6 (1.5)	
10.0	1.9 (1.4)		2.2 (1.3)	1.9 (1.3)	2.5 (1.3)	1.9 (1.3)	2.6 (1.2)	1.9 (1.2)	2.4 (1.2)	1.9 (1.2)
11.0			2.0 (1.1)	1.8 (1.1)	2.3 (1.0)	1.9 (1.0)	2.4 (1.0)	1.9 (1.0)	2.2 (0.9)	1.9 (0.9)
12.0			1.8 (0.9)		2.2 (0.8)	1.8 (0.8)	2.2 (0.8)	1.9 (0.8)	2.0 (0.8)	1.9 (0.8)
13.0			1.8 (0.7)		2.0 (0.7)	1.8 (0.7)	2.0 (0.6)	1.8 (0.6)	1.9 (0.6)	1.8 (0.6)
14.0					1.7 (0.6)		1.7 (0.5)	1.7 (0.5)	1.7	1.7
15.0					1.5		1.5	1.5	1.4	1.4
16.0					1.4		1.3		1.3	1.3
17.0							1.1		1.1	
18.0							1.0		1.0	
19.0	Table no.: 613R-HD/18.8/75/1703/4.1/08.06 SA5 Table no.: 613R-HD/18.8/75/1453/4.1/08.06 SA5								0.9	
20.0									0.7	

# 613E Crane equipment




5.0 m fly boom  
(SA)



14.6 m HA



5.0 m SA

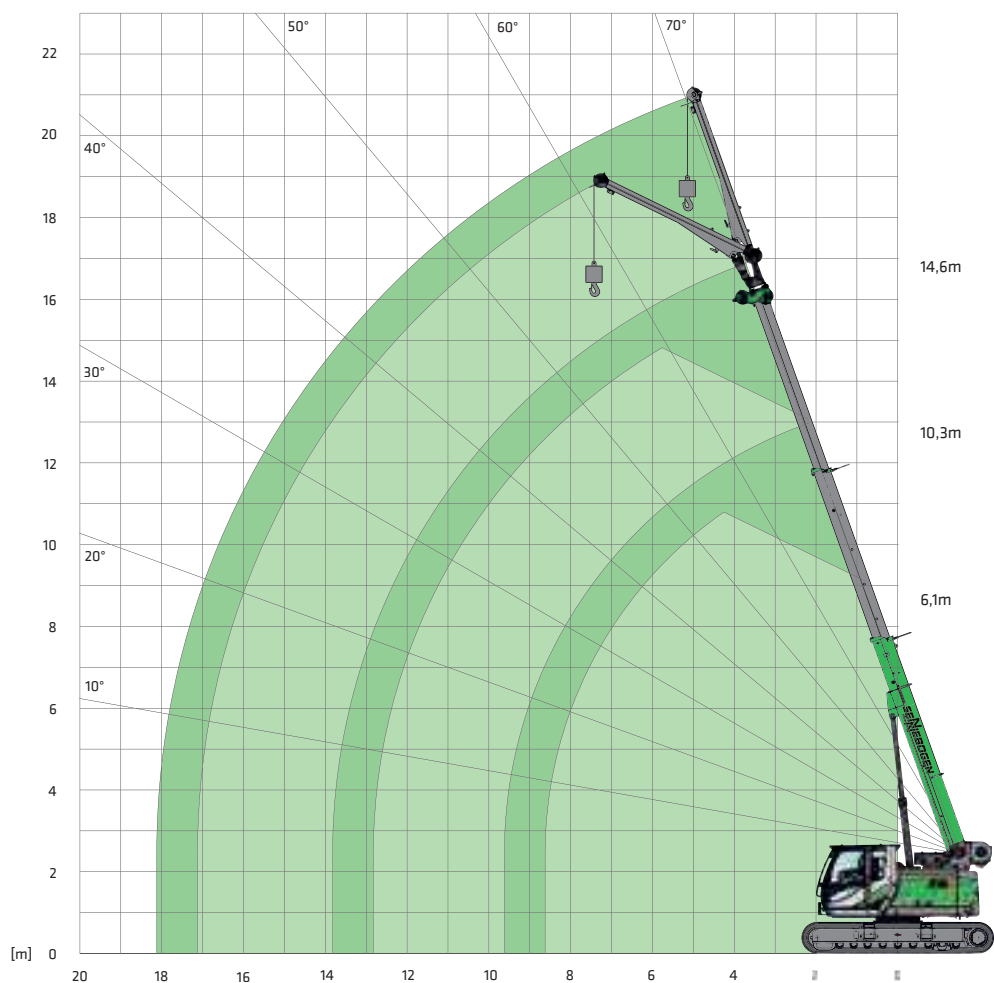


Outreach [m]	Telescopic boom length [m]									
	6.1		8.2		10.3		12.5		14.6	
	0°	45°	0°	45°	0°	45°	0°	45°	0°	45°
3.0	4.2 (4.2)									
4.0	3.5 (3.5)		4.0 (4.0)							
5.0	3.0 (3.0)		3.5 (3.5)		3.7 (3.7)		4.0 (4.4)			
6.0	2.5 (2.6)	1.9 (1.9)	3.0 (3.0)	2.0 (2.0)	3.4 (3.1)		3.6 (3.0)		3.5 (3.0)	
7.0	2.2 (2.2)	1.9 (1.9)	2.7 (2.5)	2.0 (2.0)	3.0 (2.4)	2.0 (2.0)	3.3 (2.4)		3.4 (2.4)	
8.0	1.9 (1.9)	1.8 (1.8)	2.4 (2.0)	1.9 (1.9)	2.7 (2.0)	2.0 (2.0)	3.0 (1.9)	2.0 (1.9)	3.0 (1.9)	
9.0	1.8 (1.7)		2.1 (1.7)	1.8 (1.7)	2.5 (1.6)	1.9 (1.6)	2.8 (1.6)	1.9 (1.6)	2.7 (1.6)	2.0 (1.6)
10.0			1.9 (1.4)		2.2 (1.3)	1.9 (1.3)	2.5 (1.3)	1.9 (1.3)	2.5 (1.3)	1.9 (1.3)
11.0			1.8 (1.2)		2.0 (1.1)	1.8 (1.1)	2.3 (1.1)	1.9 (1.1)	2.2 (1.1)	1.9 (1.1)
12.0					1.8 (0.9)		2.0 (0.9)	1.8 (0.9)	2.0 (0.9)	1.9 (0.9)
13.0					1.8 (0.8)		1.9 (0.8)		1.9 (0.7)	1.8 (0.7)
14.0							1.7 (0.6)		1.8 (0.6)	1.8 (0.6)
15.0	Table no.: 613R-HD/14.6/75/1703/4.1/08.06 SA5 Table no.: 613R-HD/14.6/75/1453/4.1/08.06 SA5						1.6 (0.5)		1.6 (0.5)	
16.0									1.4	

# 613E Grab equipment



## 18.8 m main boom (HA)

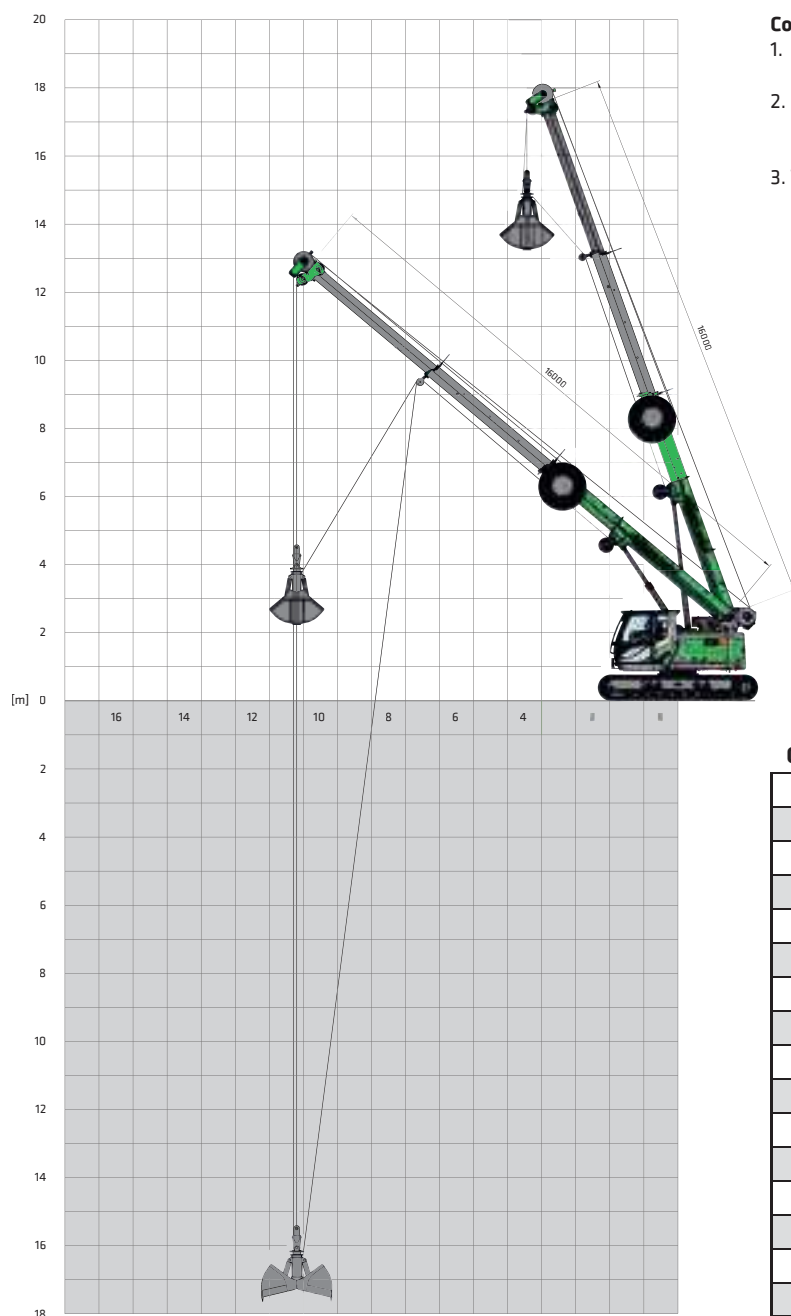

### Comments:

1. The specified load ratings apply when the machine is standing level and firm.
2. Load ratings are specified in tons and apply to a 360° slewing angle. The load ratings apply to the 613 R with maximum track width.
3. The load ratings take into account the standards DIN 15019.2 and ISO 4305



Outreach [m]	Boom length [m]			
	7.5	10.3	13.2	16.0
2.0	12.7			
3.0	11.3	8.5		
4.0	9.0	8.5	6.8	
5.0	7.2	7.3	6.8	5.1
5.5	6.3	6.4	6.3	5.1
6.0		5.7	5.7	5.0
7.0		4.4	4.5	4.4
8.0		3.5	3.6	3.6
9.0			3.0	3.0
10.0			2.5	2.5
11.0			2.2	2.2
12.0				1.8
13.0				1.7
14.0				1.4
15.0				
16.0				


**613E**

## Work platform




**Work platform**  
**18.8 m HA**

The permitted load capacity for the work platform is 350 kg:  
2 persons of 80 kg each + 190 kg additional load.

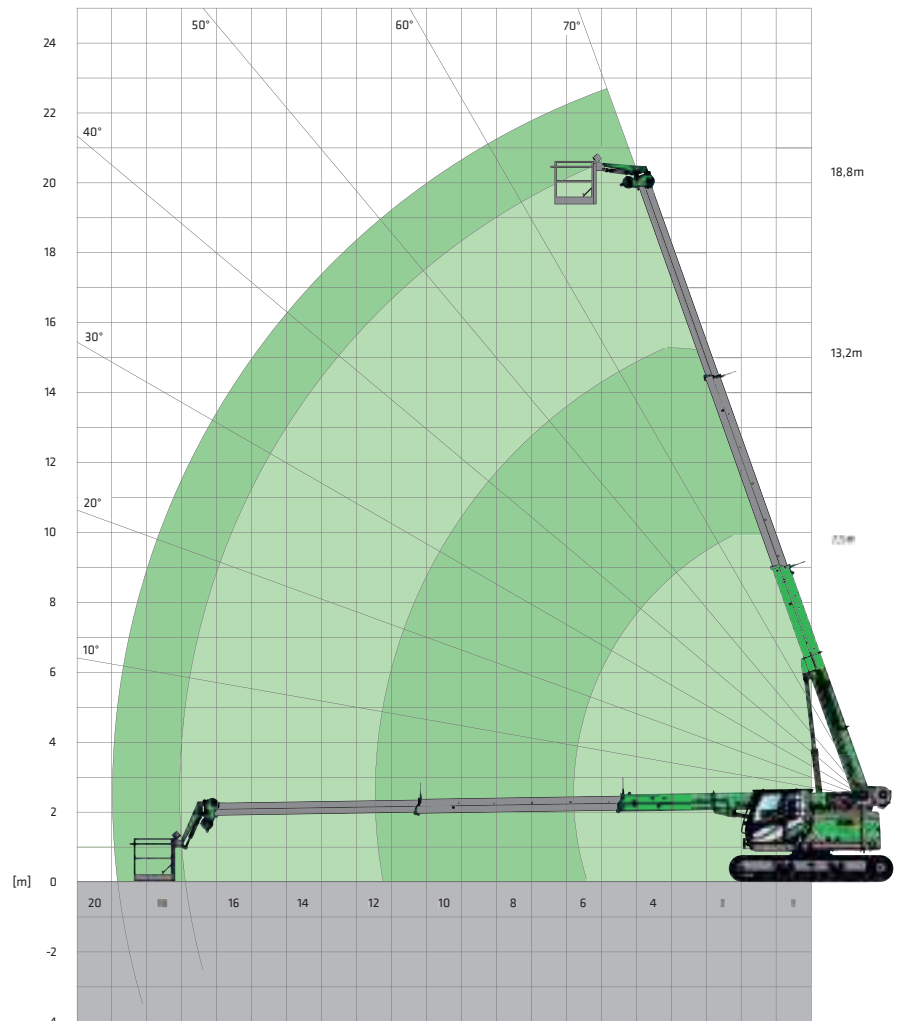


**Work platform**  
**14.6 m HA**

The permitted load capacity for the work platform is 350 kg:  
2 persons of 80 kg each + 190 kg additional load.

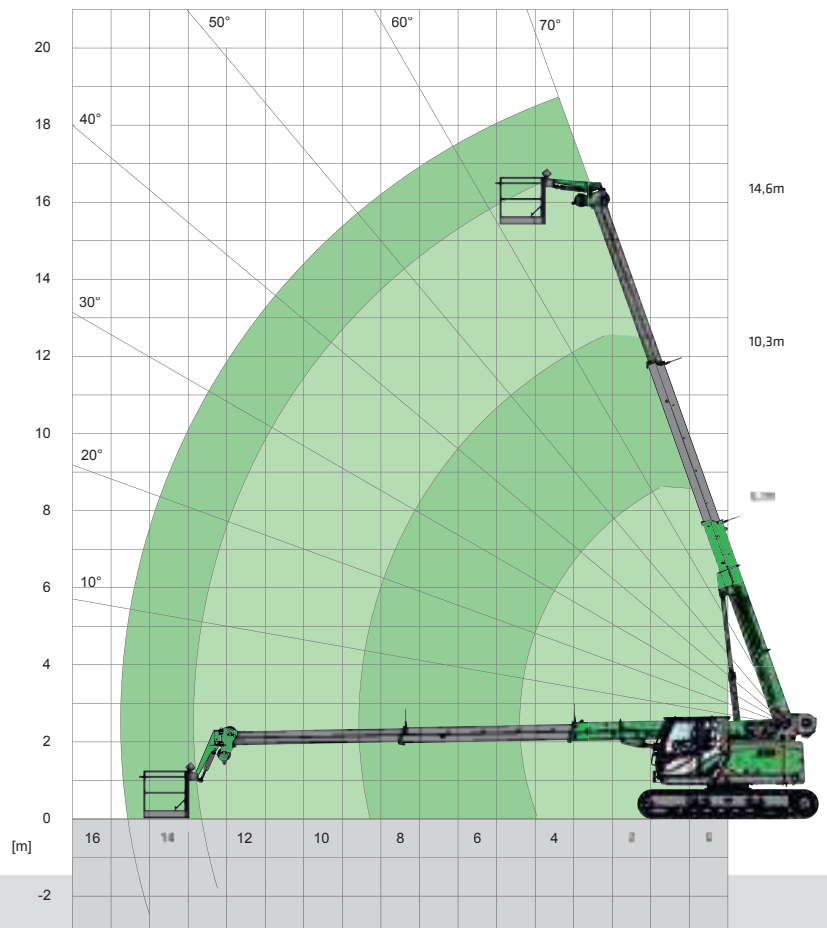

Subject to change.

# 613E Lift fork equipment

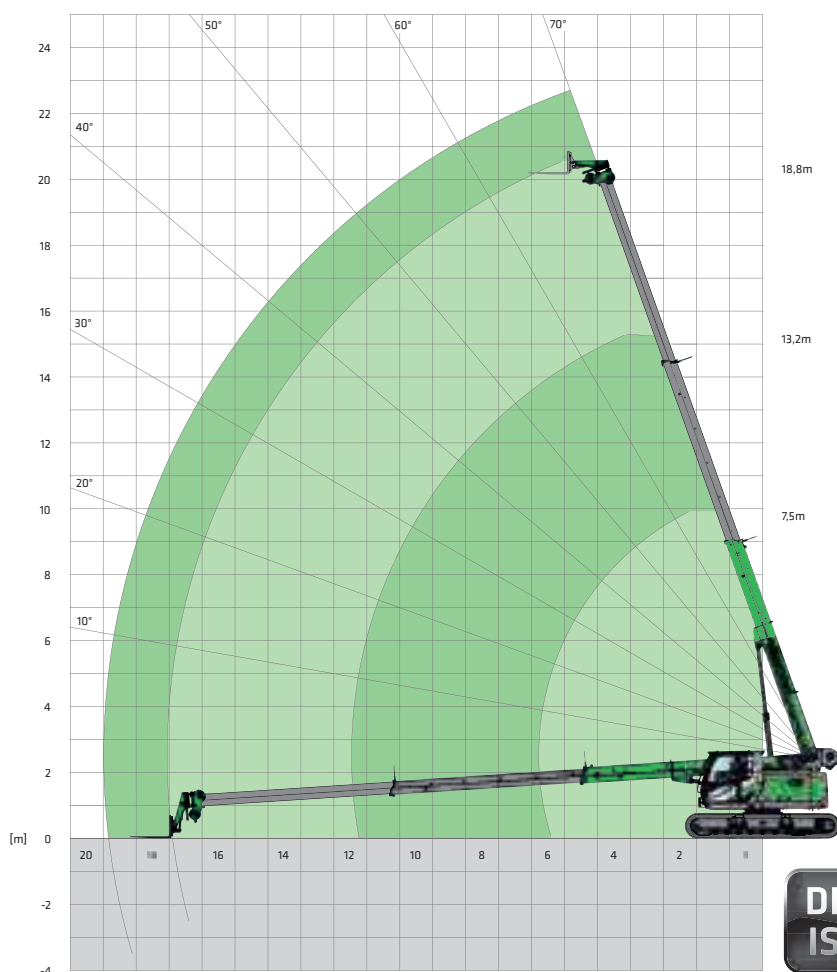

7.5–18.8 m lift fork

## Comments:

1. The specified load ratings apply when the machine is standing level and firm
2. Load ratings are specified in tons and apply to a 360° slewing angle.
3. The load ratings take into account the standards DIN 15019.2 and ISO 4305.
4. The load ratings apply to loads placed in the center of the lift fork with a center of gravity that is 500 mm from the fork carriage.
5. Load ratings must be limited or reduced when conditions are unfavorable, such as soft or uneven ground, slopes, wind, lateral loads, swinging loads, jerking or sudden stopping of load, operator inexperience, driving with load
6. The load ratings apply to the maximum track width.
7. The load ratings in brackets ( ) apply to the minimum track width.
8. The specified load ratings are guidelines only. The currently valid load ratings can be found in the tables in the operating manual.




7.5–18.8 m lift fork

Outreach [m]	Boom length [m]				
	7.5	10.3	13.2	16	18.8
2.0	2.5 (1.53)				
3.0	2.5 (1.53)	1.3 (0.63)			
4.0	2.5 (1.53)	1.3 (0.63)	0.9		
4.5	2.5 (1.53)	1.3 (0.63)	0.9	0.6	
5.0	2.5 (1.53)	1.3 (0.63)	0.9	0.6	0.5
6.0	2.5 (1.53)	1.3 (0.63)	0.9	0.6	0.5
7.0	2.5 (1.53)	1.3 (0.63)	0.9	0.6	0.5
8.0	2.5/7.5 (1.53)/7.5	1.3 (0.63)	0.9	0.6	0.5
9.0		1.3 (0.63)	0.9	0.6	0.5
10.0		1.3 (0.63)	0.9	0.6	0.5
11.0		1.3/10.3 (0.63)/10.3	0.9	0.6	0.5
12.0			0.9	0.6	0.5
13.0			0.9/13.2	0.6	0.5
14.0				0.6	0.5
15.0				0.6	0.5
16.0				0.6	0.5
17.0					0.5
18.0	Table no.: 613R-HD/18.8/75/1703(1453)/4.1/08.06, lift fork				0.5/18.8
I	0%	25%	50%	75%	100%
II	0%	25%	50%	75%	100%

# 613E Lift fork equipment



6.1–14.6 m lift fork

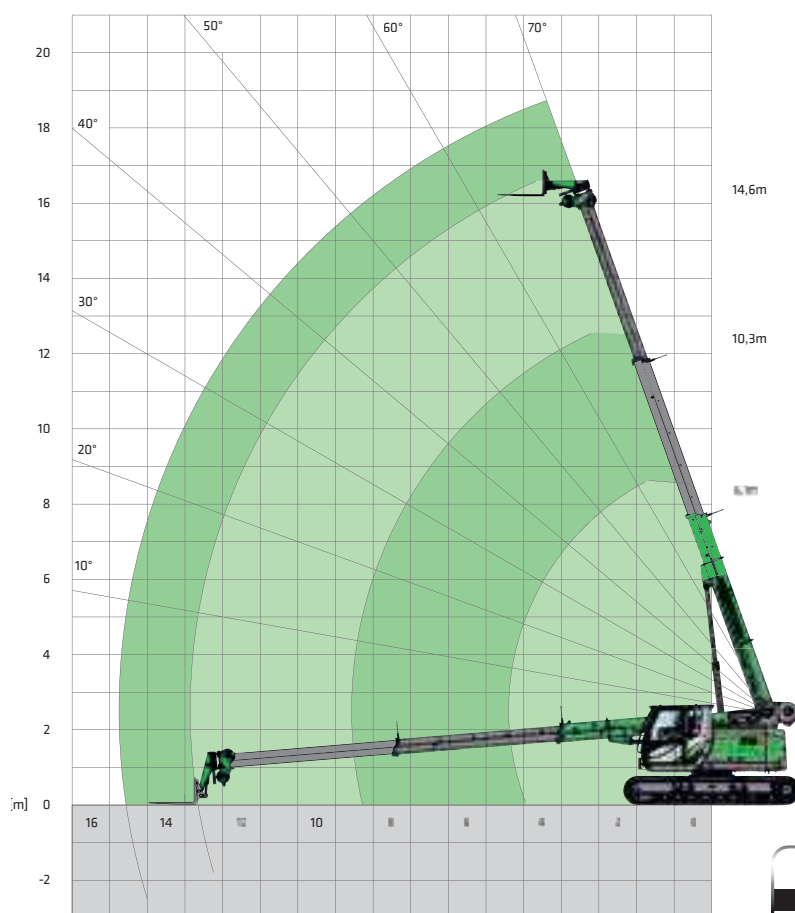


6.1–14.6 m lift fork


Outreach [m]	Boom length [m]				
	6.1	8.2	10.3	12.5	14.6
2.0	3.0 (2.0)				
3.0	3.0 (2.0)	1.8 (1.28)			
4.0	3.0 (2.0)	1.8 (1.28)	1.4 (0.7)		
4.5	3.0 (2.0)	1.8 (1.28)	1.4 (0.7)	1.0 (0.37)	
5.0	3.0 (2.0)	1.8 (1.28)	1.4 (0.7)	1.0 (0.37)	0.6
6.0	3.0 (2.0)	1.8 (1.28)	1.4 (0.7)	1.0 (0.37)	0.6
7.0		1.8 (1.28)	1.4 (0.7)	1.0 (0.37)	0.6
8.0		1.8 (1.28)	1.4 (0.7)	1.0 (0.37)	0.6
9.0		1.8/8.2 (1.28) / 8.2	1.4 (0.7)	1.0 (0.37)	0.6
10.0			1.4 (0.7)	1.0 (0.37)	0.6
11.0			1.4/10.3 (0.7)/10.3	1.0 (0.37)	0.6
12.0				1.0 (0.37)	0.6
13.0				1.0/12.5 (0.37)/12.5	0.6
14.0					0.6
15.0					0.6/14.6
16.0					
17.0					
18.0	Table no.: 613R-HD/14.6/75/1703(1453)/4.1/08.06, lift fork				
I	0%	25%	50%	75%	100%
II	0%	25%	50%	75%	100%

# 613E Transport dimensions


6100 (Ausleger / boom 18,8m)  
4700 (Ausleger / boom 14,6m)

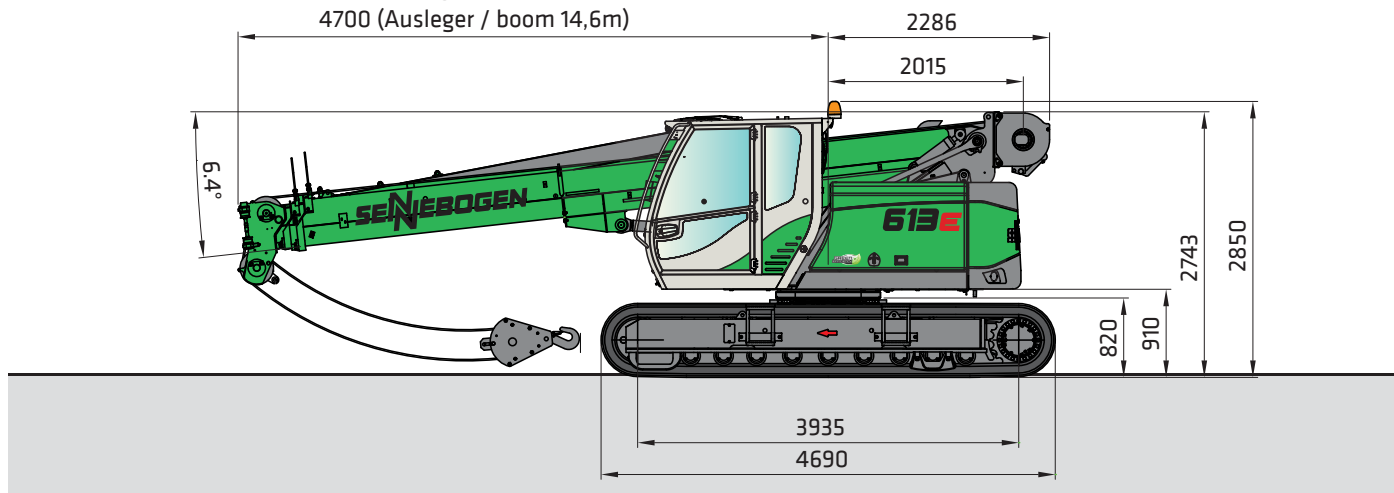

6195 (Ausleger / boom 18,8m)  
4795 (Ausleger / boom 14,6m)

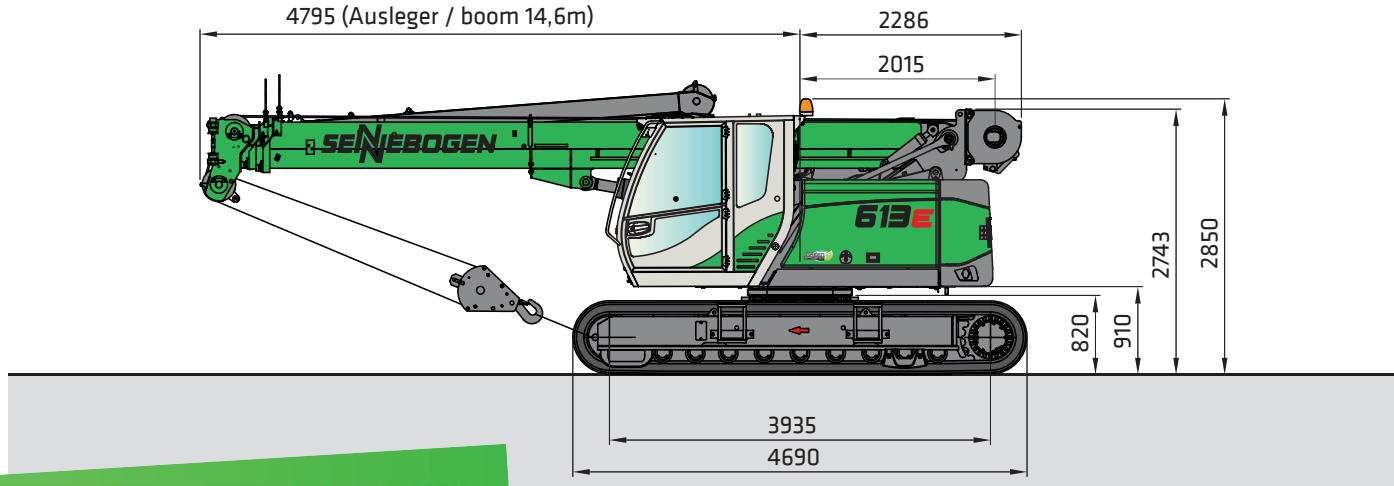


2.53 m transport width

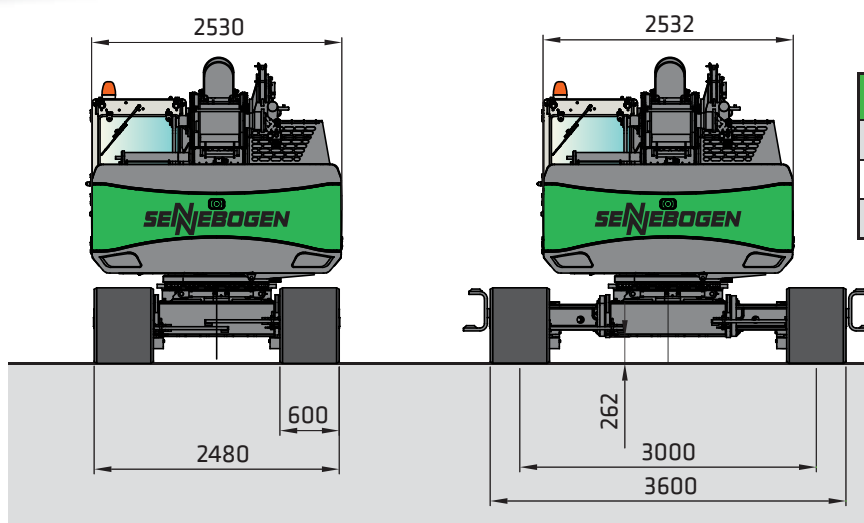


Base plates	Min. transport width
600 mm	2,530 mm
700 mm	2,600 mm
800 mm	2,700 mm

# 613E Attachments

## 5 m fly boom

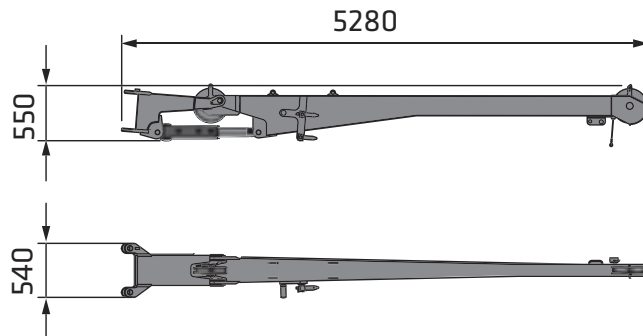


## Hydraulic grapple with teeth and drainage holes

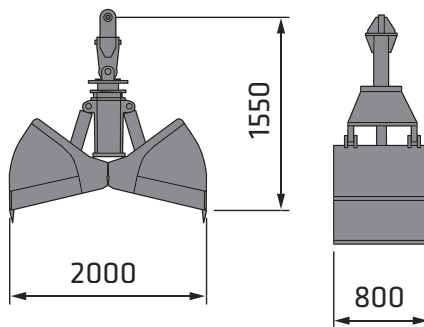


Weight	Capacity
kg	liters
750	600


## Work platform

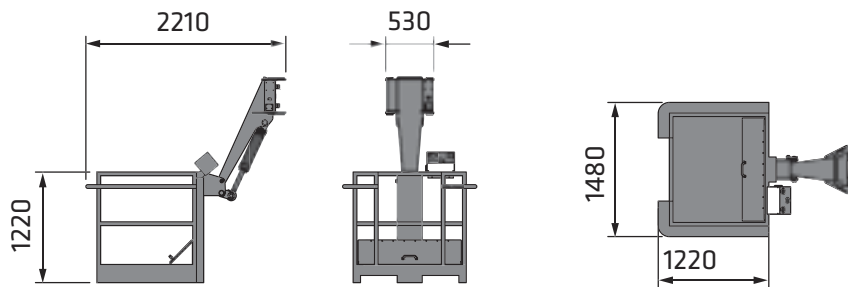

## Lift fork at-

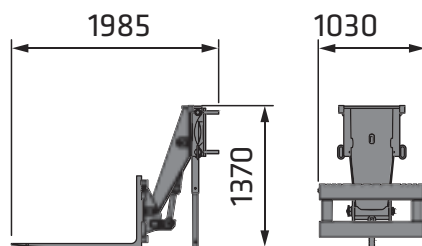

**613E**

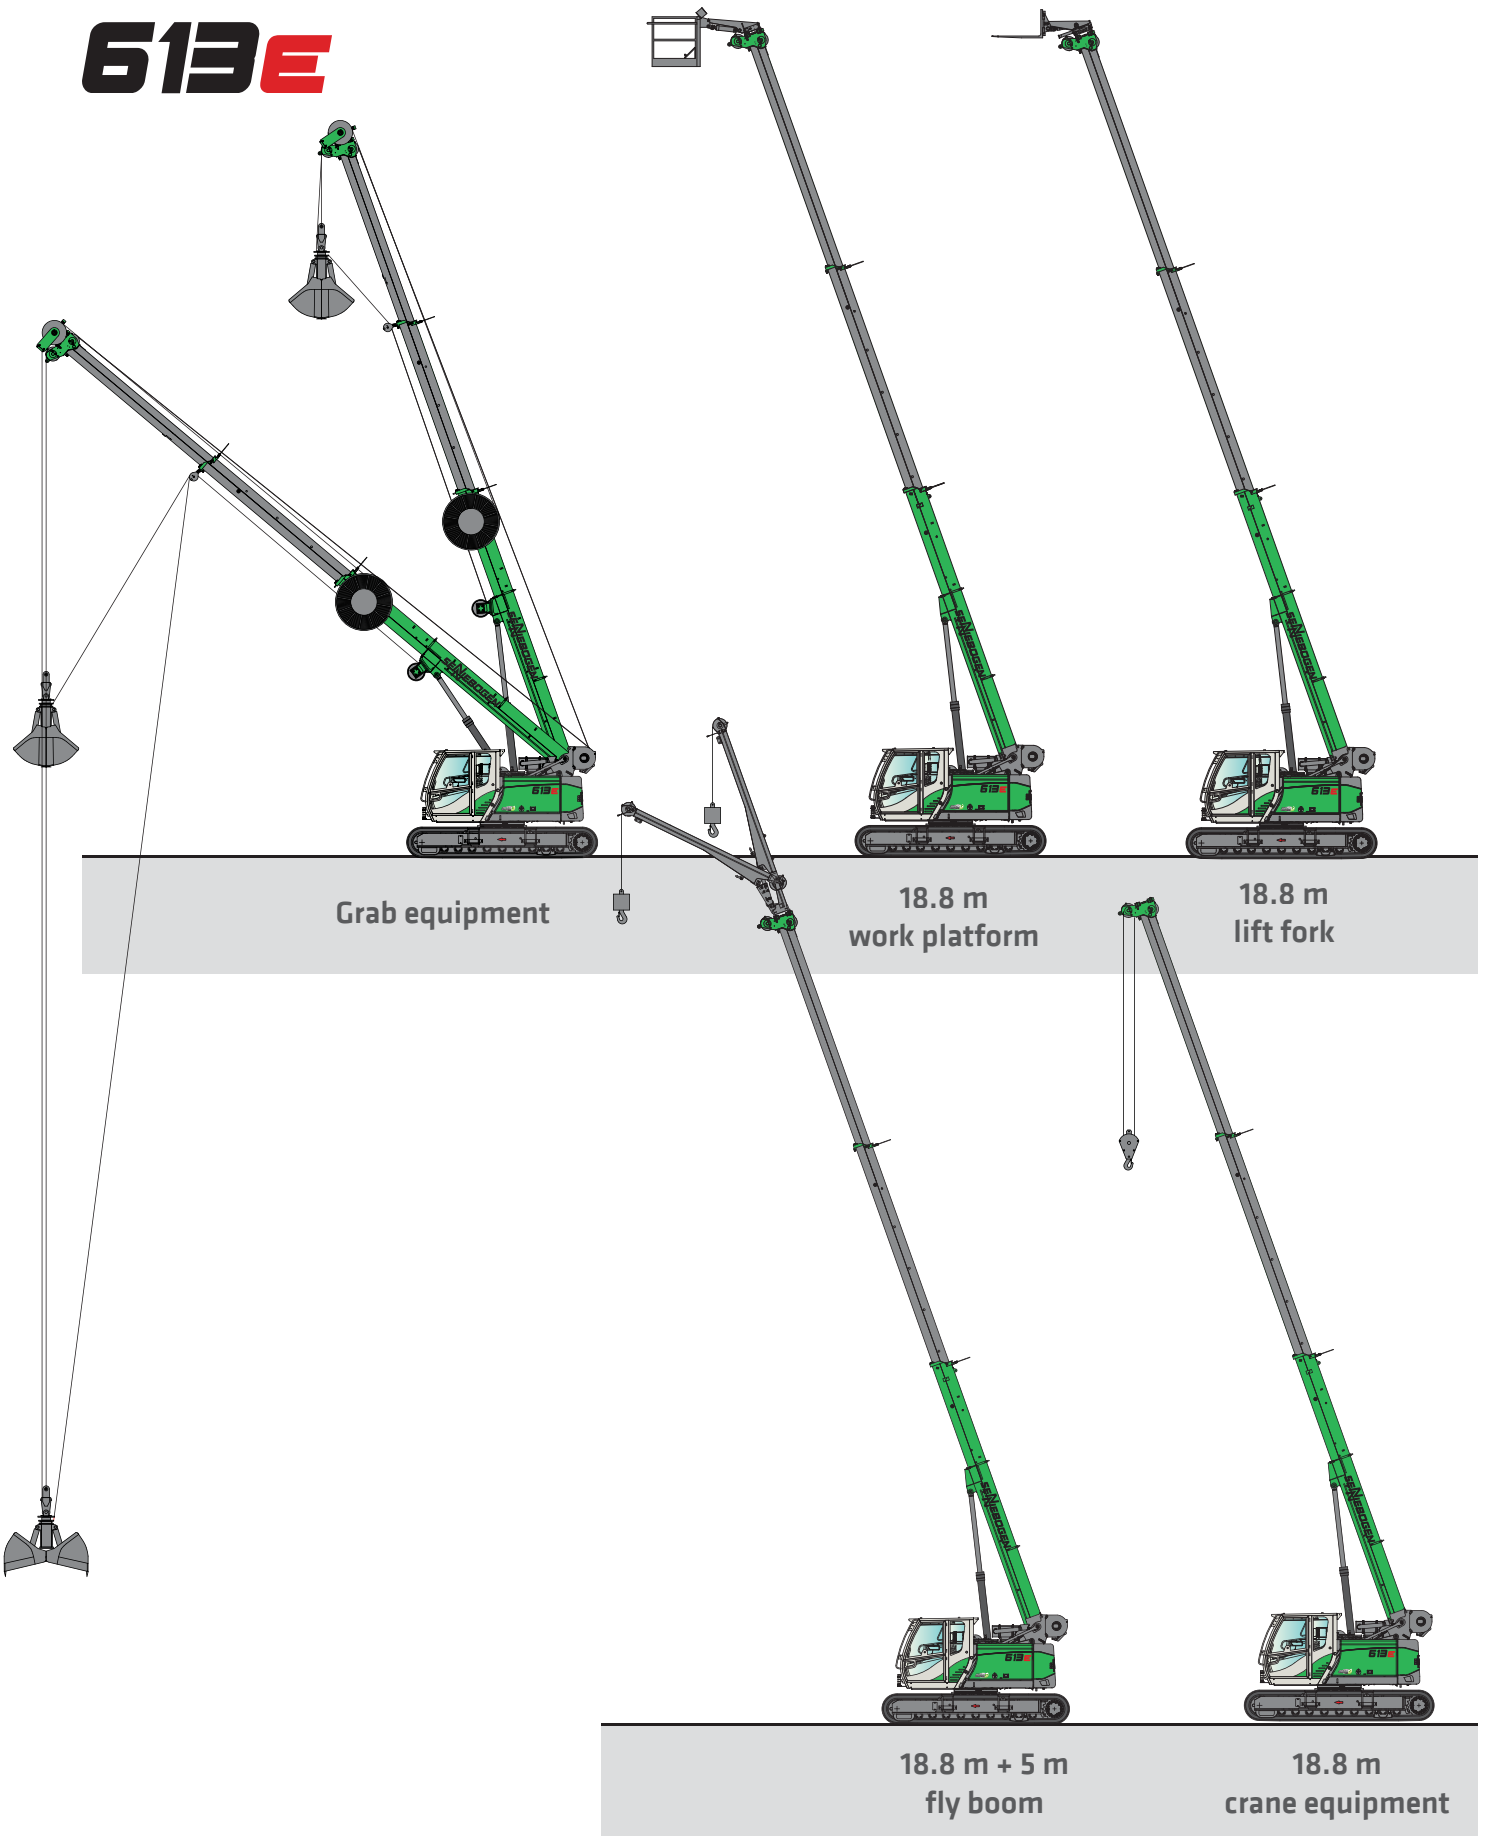




The SENNEBOGEN 613 E crawler crane moves and lifts loads on the construction site of a temporary sewage treatment plant in Germany.



This image shows a full page of blank graph paper. The grid consists of small squares formed by thin green lines. There are 20 columns and 20 rows of squares, creating a total area of 400 small squares. The background is white, and the grid lines are a consistent light green color.

# 613E

# R

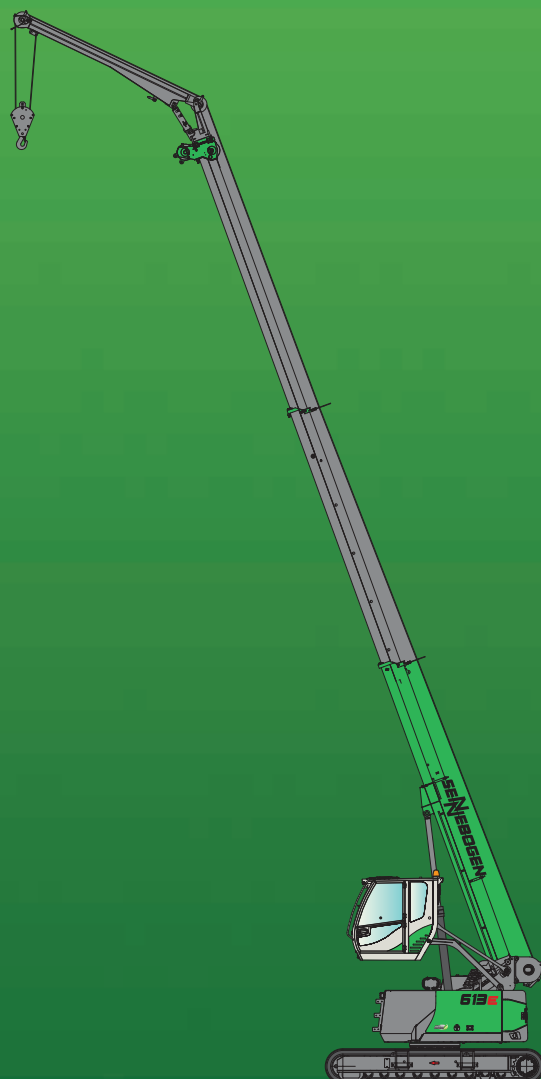

This catalog describes machine models, scopes of equipment of individual models, and configuration options (standard equipment and optional equipment) of the machines supplied by SENNEBOGEN Maschinenfabrik GmbH. Machine illustrations can contain optional equipment and supplemental equipment. Actual equipment may vary depending on the country to which the machines are delivered, especially in regard to standard and optional equipment. All product designations used may be trademarks of SENNEBOGEN Maschinenfabrik GmbH or other supplying companies, and any use by third parties for their own purposes may violate the rights of the owners.

Please contact your local SENNEBOGEN sales partner for information concerning the equipment variants offered. Requested performance characteristics are only binding if they are expressly stipulated upon conclusion of the contract. Delivery options and technical features are subject to change. Errors and omissions excepted. Equipment is subject to change, and rights of advancement are reserved. © SENNEBOGEN Maschinenfabrik GmbH, Straubing, Germany. Reproduction in whole or in part only with written consent of SENNEBOGEN Maschinenfabrik GmbH, Straubing, Germany.

## SENNEBOGEN

**SENNEBOGEN**  
**Maschinenfabrik GmbH**  
Sennebogenstraße 10  
94315 Straubing, Germany

Tel. +49 9421 540-144/146  
Fax +49 9421 43 882  
[marketing@sennebogen.de](mailto:marketing@sennebogen.de)

Order no. 299172  
613M-R-E-0817075

GO FOR GREEN

 [www.sennebogen.com](http://www.sennebogen.com)  
Courtesy of CraneMarket.com